

DUAL SAFETY VALVES FOR HEATING TECHNOLOGIES

WVR-SVA, WVR-SVU

02.07.2026



Table of contents

1	WVR-SV.....	4
2	WVR-SVAA FL HT.....	5
3	WVR-SVAA FL NIRO HT	7
4	WVR-SVAA BS FL HT	9
5	WVR-SVAA BS FL NIRO HT	11
6	WVR-SVAA SE HT	13
7	WVR-SVAA SE NIRO HT	14
8	WVR-SVAA BS SE HT	15
9	WVR-SVAA BS SE NIRO HT.....	16
10	WVR-SVUA FL HT.....	17
11	WVR-SVUA FL NIRO HT	18
12	WVR-SVUA BS FL HT	19
13	WVR-SVUA BS FL NIRO HT	20
14	WVR-SVUA SE HT	21
15	WVR-SVUA SE NIRO HT	22
16	WVR-SVUA BS SE HT	23
17	WVR-SVUA BS SE NIRO HT.....	24
18	WVR-SVUA P FL HT	25
19	WVR-SVUA P FL NIRO HT	27
20	WVR-SVUA P BS FL HT.....	29
21	WVR-SVUA P BS FL NIRO HT.....	31
22	WVR-SVUA P SE HT	33
23	WVR-SVUA P SE NIRO HT.....	34
24	WVR-SVUA P BS SE HT.....	35
25	WVR-SVUA P BS SE NIRO HT	36
26	Legal notices.....	37

1 WVR-SV

HT: Temperature up to +200°C

WVR-SVAA: Change-over safety valve combination - back-pressure dependent

WVR-SVA	Connection	Form	Material	Valve type
WVR-SVA PS25 / PS40 / PS63	Flanged ends		St	WVR-SVAA FL
			NIRO	WVR-SVAA FL NIRO
	Screwed ends		St	WVR-SVAA BS FL
			NIRO	WVR-SVAA BS FL NIRO
			St	WVR-SVAA SE
			NIRO	WVR-SVAA SE NIRO
			St	WVR-SVAA BS SE
			NIRO	WVR-SVAA BS SE NIRO

WVR SVUA: Change-over safety valve combination - back-pressure independent

WVR-SVU	Connection	Form	Material	Valve type
WVR-SVU PS25 / PS40 / PS63	Flanged ends		St	WVR-SVUA FL
			NIRO	WVR-SVUA FL NIRO
	Screwed ends		St	WVR-SVUA BS FL
			NIRO	WVR-SVUA BS FL NIRO
			St	WVR-SVUA SE
			NIRO	WVR-SVUA SE NIRO
			St	WVR-SVUA BS SE
			NIRO	WVR-SVUA BS SE NIRO

WVR SVUA P: Change-over safety valve combination - high performance - back-pressure independent


WVR-SVU P	Connection	Form	Material	Valve type
WVR-SVU P PS25 / PS40 / PS63	Flanged ends		St	WVR-SVUA P FL
			NIRO	WVR-SVUA P FL NIRO
	Screwed ends		St	WVR-SVUA P BS FL
			NIRO	WVR-SVUA P BS FL NIRO
			St	WVR-SVUA P SE
			NIRO	WVR-SVUA P SE NIRO
			St	WVR-SVUA P BS SE
			NIRO	WVR-SVUA P BS SE NIRO

St = steel SS = stainless steel

2 WVR-SVAA FL HT

O: PTFE seat seal, **FL:** Flanged ends, **HT:** Temperature up to +200°C

WVR-SVA steel change-over safety valve combination - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

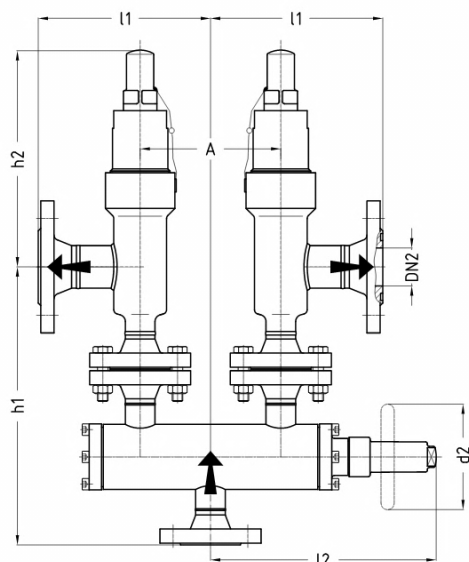

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size: Flanged ends acc. to:																		Response pressure range		
	Base valve		Typ e*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		PN63 DIN 2636 EN1092-1		ANSI 300 RF										h2*) for
DN1	DN2	Base	Typ e	l1	h1	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	A*	bar	bar	
15	25	15/25		160	281	156	300	187	321	172	330	207		193	60	120	145	5-63		
15	25	15/25	HB			155	299					207		193	60	120		5-40		
20	25	15/25	HB			170	323					207		208	60	150		5-40		
25	25	15/25	HB K			160	292					207		259	120	160		5-40		
25	25	15/25	HBJ			180	302					207		259	120	160		5-40		
20	32	20/32		185	311	183	336	206	360	198	373	238	258	208	60	150	160	5-63	40-63	
25	32	20/32	HB			180	302					238		259	120	160		5-40		
32	32	20/32	HB			195	311					238		259	120	180		5-40		
25	40	25/40		190	330	196	318	221	372	213	365	246	266	259	120	160	175	5-63	24-63	
32	40	25/40	HB			195	311					246	266	259	120	180		5-40	24-40	

Nominal size:				Flanged ends acc. to:								Response pressure range							
40	40	25/40	HB			222	331					246	266	312	140	214		5-40	24-40
32	50	32/50		213	344	218	338			234	384	278		259	120	180		5-40	
40	50	32/50	HB			222	331					278		312	140	214		5-40	
50	50	32/50	HB			239	355					278		319	140	228		5-40	
40	65	40/65		256	333	254	352			272	403	281		312	140	214		5-40	
50	65	40/65	HB			239	355					281		319	140	228		5-40	
65	65	40/65	HB			283	409					281		350	140	276		5-40	

Table 1: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.
 Type*: HB = installation lengths according to EN-standard, A*): for PN63 DIN-flange, DIN/EN flange facings with DIN 2512 tongue/groove as standard

3 WVR-SVAA FL NIRO HT

O: PTFE seat seal, **FL:** Flanged ends, **HT:** Temperature up to +200°C


WVR-SVA stainless steel change-over safety valve combination - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

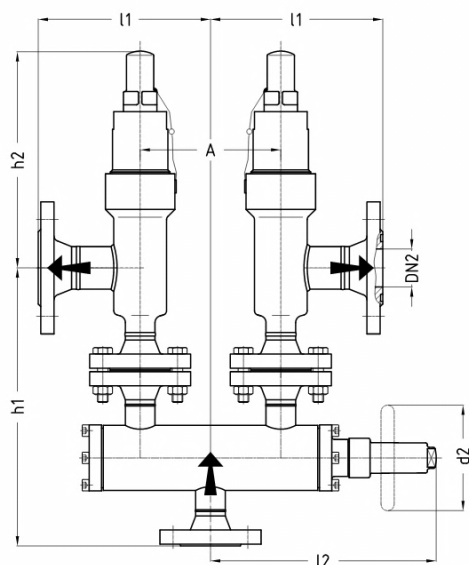

Nominal size: Flanged ends acc. to:																			Response pressure range		
		Base valve		Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		PN63 DIN 2636 EN1092-1		ANSI 300 RF									h2*) for	
DN1	DN2	Base	Type	l1	h1	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	A*	bar	bar		
15	25	15/25		160	281	156	300	187	321	172	330	207		193	60	120	145	5-63			
15	25	15/25	HB			155	299					207		193	60	120		5-40			
20	25	15/25	HB			170	323					207		208	60	150		5-40			
25	25	15/25	HBK			160	292					207		259	120	160		5-40			
25	25	15/25	HBJ			180	302					207		259	120	160		5-40			
20	32	20/32		185	311	183	336	206	360	198	373	238	258	208	60	150	160	5-63	40-63		
25	32	20/32	HB			180	302					238		259	120	160		5-40			
32	32	20/32	HB			195	311					238		259	120	180		5-40			
25	40	25/40		190	330	196	318	221	372	213	365	246	266	259	120	160	175	5-63	24-63		
32	40	25/40	HB			195	311					246	266	259	120	180		5-40	24-40		
40	40	25/40	HB			222	331					246	266	312	140	214		5-40	24-40		
32	50	32/50		213	344	218	338			234	384	278		259	120	180		5-40			
40	50	32/50	HB			222	331					278		312	140	214		5-40			
50	50	32/50	HB			239	355					278		319	140	228		5-40			

Nominal size:				Flanged ends acc. to:								Response pressure range							
40	65	40/65		256	333	254	352			272	403	281		312	140	214		5-40	
50	65	40/65	HB			239	355					281		319	140	228		5-40	
65	65	40/65	HB			283	409					281		350	140	276		5-40	

Table 2: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, A*: for PN63 DIN-flange, DIN/EN flange facings with DIN 2512 tongue/groove as standard

4 WVR-SVAA BS FL HT

O: PTFE seat seal, **BS:** bursting discs, **FL:** flanged ends, **HT:** Temperature up to +200°C


WVR-SVA BS steel change-over safety valve combination with bursting discs - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

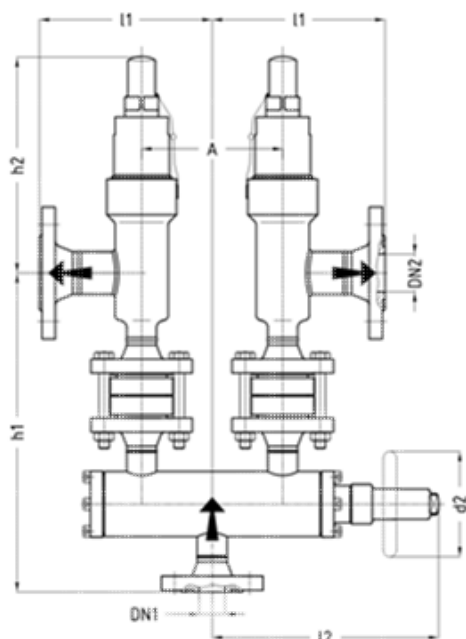

Nominal size:			Flanged ends acc. to:						Response pressure range						
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		ANSI 300 RF								h2*) for
DN1/DN2	Base	Type	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15/25	15/25		160	322	156	341	172	371	207		193	60	120	5-40	
15/25	15/25	HB			155	340			207		193	60	120	5-40	
20/25	15/25	HB			170	364			207		208	60	150	5-40	
25/25	15/25	HBK			160	333			207		259	120	160	5-40	
25/25	15/25	HBJ			180	343			207		259	120	160	5-40	
20/32	20/32		185	352	183	377	198	414	238		208	60	150	5-40	
25/32	20/32	HB			180	343			238		259	120	160	5-40	
32/32	20/32	HB			195	352			238		259	120	180	5-40	
25/40	25/40		190	376	196	364	213	411	246	266	259	120	160	5-40	24-40
32/40	25/40	HB			195	357			246	266	259	120	180	5-40	24-40
40/40	25/40	HB			222	377			246	266	312	140	214	5-40	24-40
32/50	32/50		213	390	218	384	234	430	278		259	120	180	5-40	
40/50	32/50	HB			222	377			278		312	140	214	5-40	
50/50	32/50	HB			239	401			278		319	140	228	5-40	
40/65	40/65		256	379	254	398	272	449	281		312	140	214	5-40	
50/65	40/65	HB			239	401			281		319	140	228	5-40	

Nominal size:			Flanged ends acc. to:										Response pressure range	
65/65	40/65	HB			283	455			281		350	140	276	5-40

Table 3: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, DIN/EN flange facings with DIN 2512 tongue/groove as standard

5 WVR-SVAA BS FL NIRO HT

O: PTFE seat seal, **BS:** bursting discs, **FL:** flanged ends, **HT:** Temperature up to +200°C

WVR-SVA BS stainless steel change-over safety valve combination with bursting discs - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

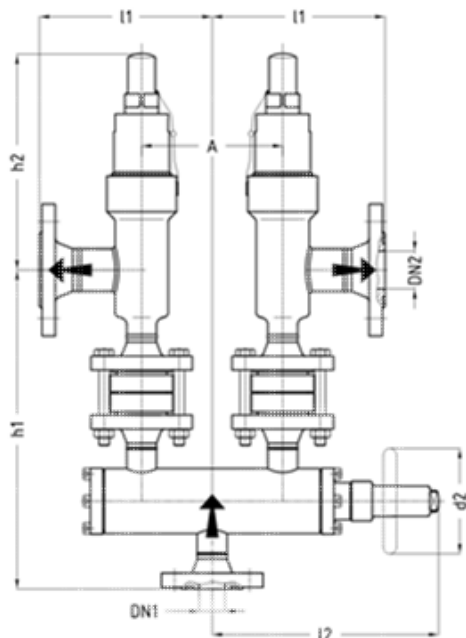

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Flanged ends acc. to: / flange acc. to:						Response pressure range						
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		ANSI 300 RF								h2*) for
DN1/DN2	Base	Type	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15/25	15/25		160	322	156	341	172	371	207		193	60	120	5-40	
15/25	15/25	HB			155	340			207		193	60	120	5-40	
20/25	15/25	HB			170	364			207		208	60	150	5-40	
25/25	15/25	HBK			160	333			207		259	120	160	5-40	
25/25	15/25	HBJ			180	343			207		259	120	160	5-40	
20/32	20/32		185	352	183	377	198	414	238		208	60	150	5-40	
25/32	20/32	HB			180	343			238		259	120	160	5-40	
32/32	20/32	HB			195	352			238		259	120	180	5-40	
25/40	25/40		190	376	196	364	213	411	246	266	259	120	160	5-40	24-40
32/40	25/40	HB			195	357			246	266	259	120	180	5-40	24-40
40/40	25/40	HB			222	377			246	266	312	140	214	5-40	24-40
32/50	32/50		213	390	218	384	234	430	278		259	120	180	5-40	
40/50	32/50	HB			222	377			278		312	140	214	5-40	
50/50	32/50	HB			239	401			278		319	140	228	5-40	
40/65	40/65		256	379	254	398	272	449	281		312	140	214	5-40	
50/65	40/65	HB			239	401			281		319	140	228	5-40	

Nominal size:			Flanged ends acc. to: / flange acc. to:										Response pressure range	
65/65	40/65	HB			283	455			281		350	140	276	5-40

Table 4: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, DIN/EN flange facings with DIN 2512 tongue/groove as standard

6 WVR-SVAA SE HT

O: PTFE seat seal, **SE:** Screwed ends, **HT:** Temperature up to +200°C

WVR-SVA steel change-over safety valve combination - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

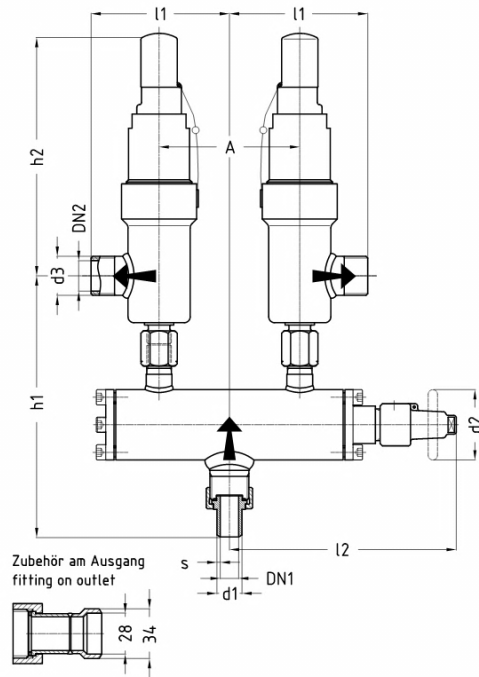

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating


Nominal size:			Welding ends acc. to:				Screwed ends acc. to:							Response pressure range	
DN*		Base valve	ISO Series 1		ANSI Sched40										
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar	
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	223	207	193	60	120	5-63	

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

7 WVR-SVAA SE NIRO HT

O: PTFE seat seal, **SE:** Screwed ends, **HT:** Temperature up to +200°C

WVR-SVA stainless steel change-over safety valve combination - independent of back-pressure, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

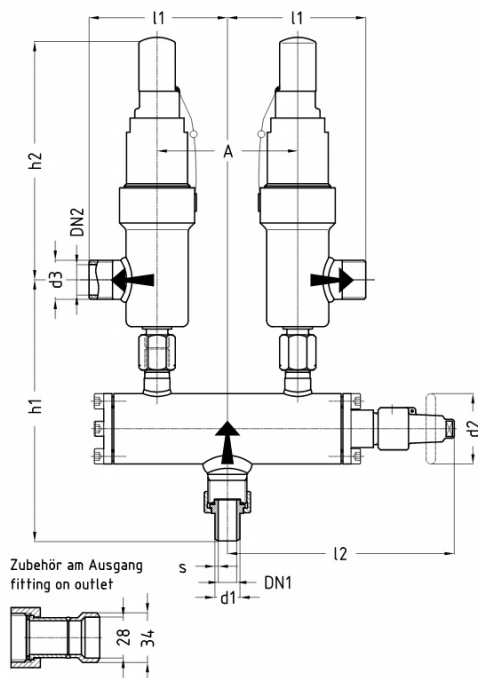

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:				Screwed ends acc. to:								Response pressure range		
DN*		Base valve	ISO Series 1		ANSI Sched40											
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar		
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	223	207	193	60	120	5-63		


Table 5: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

8 WVR-SVAA BS SE HT

O: PTFE seat seal, **BS:** bursting discs, **SE:** screwed ends, **HT:** temperature up to +200°C

WVR-SVA BS steel change-over safety valve combination with bursting discs - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

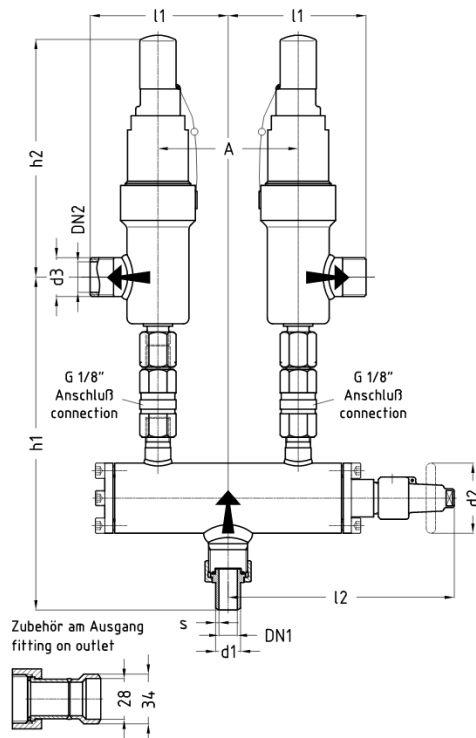

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:		Screwed ends acc. to:						Response pressure range				
DN*		Base valve	ISO Series 1		ANSI Sched40									
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	285	207	193	60	120	5-63


Table 6: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

9 WVR-SVAA BS SE NIRO HT

O: PTFE seat seal, **BS:** bursting discs, **SE:** screwed ends, **HT:** temperature up to +200°C

WVR-SVA BS stainless steel change-over safety valve combination with bursting discs - back-pressure dependent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

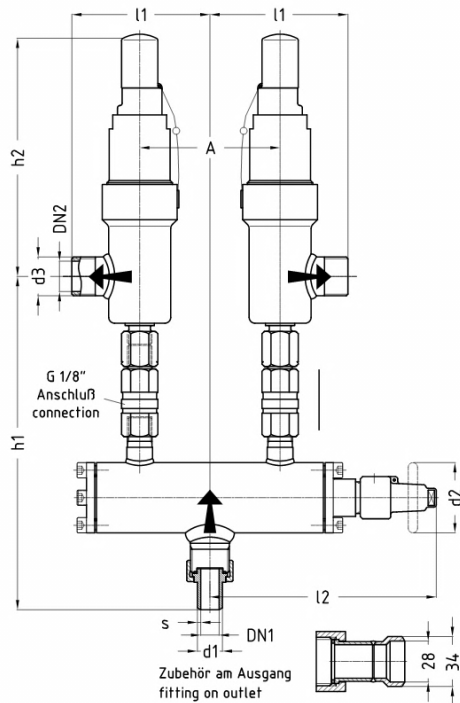

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:					Screwed ends acc. to:							Response pressure range	
DN*		Base valve	ISO Series 1		ANSI Sched40										
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar	
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	285	207	193	60	120	5-63	


Table 7: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

10 WVR-SVUA FL HT

O: PTFE seat seal, **FL:** Flanged ends, **HT:** Temperature up to +200°C

WVR-SVU steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

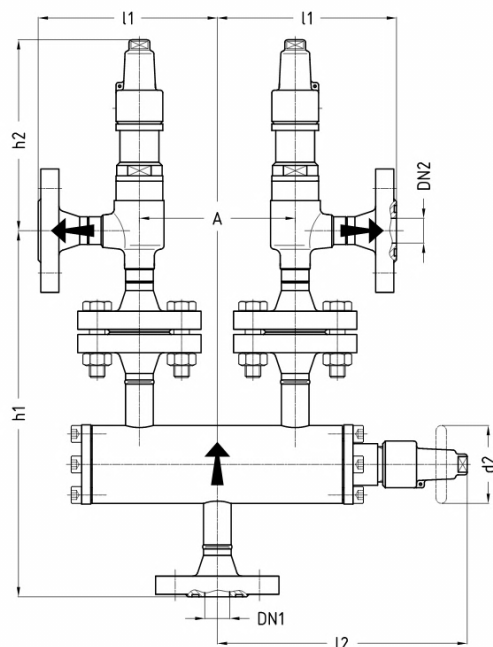

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Flanged ends acc. to																Response pressure range	
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		PN63 DIN 2636 EN1092-1		ANSI 300 RF										h2*) for
DN1/ DN2	Base	Type	l1	h1	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	A*	bar	bar	
10/10	10/10		126	269	129	279	154	309			148	175	187	60	108	135	4-63	28-63	
15/15	15/15		132	263	138	282	159	303	152	325	148	175	193	60	120	145	4-63	28-63	
15/25	15/15	HB			155	298					148	175	193	60	120		4-40	28-40	
20/25	15/15	HB			170	322					148	175	208	60	150		4-40	28-40	
25/25	15/15	HBJ			180	301					148	175	259	120	160		4-40	28-40	

Table 8: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, A*: for PN63 DIN-flange, DIN/EN flange facings with DIN 2512 tongue/groove as standard

11 WVR-SVUA FL NIRO HT

O: PTFE seat seal, **FL:** Flanged ends, **HT:** Temperature up to +200°C

WVR-SVU stainless steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

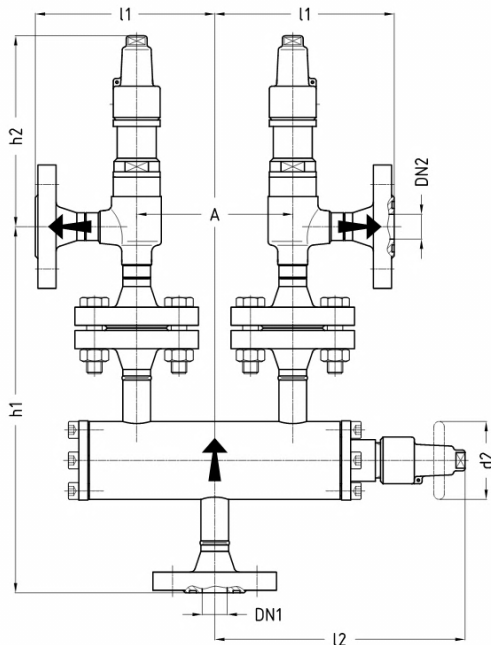

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Flanged ends acc. to:														Response pressure range	
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		PN63 DIN 2636 EN1092-1		ANSI 300 RF								h2*) for	
DN1/ DN2	Base	Type	l1	h1	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	A*	bar	bar
10/10	10/10		126	269	129	279	154	309			148	175	187	60	108	135	4-63	28-63
15/15	15/15		132	263	138	282	159	303	152	325	148	175	193	60	120	145	4-63	28-63
15/25	15/15	HB			155	298					148	175	193	60	120		4-40	28-40
20/25	15/15	HB			170	322					148	175	208	60	150		4-40	28-40
25/25	15/15	HBJ			180	301					148	175	259	120	160		4-40	28-40

Table 9: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, A*: for PN63 DIN-flange, DIN/EN flange facings with DIN 2512 tongue/groove as standard

12 WVR-SVUA BS FL HT

O: PTFE seat seal, **BS:** bursting discs, **FL:** flanged ends, **HT:** Temperature up to +200°C

WVR-SVU BS steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

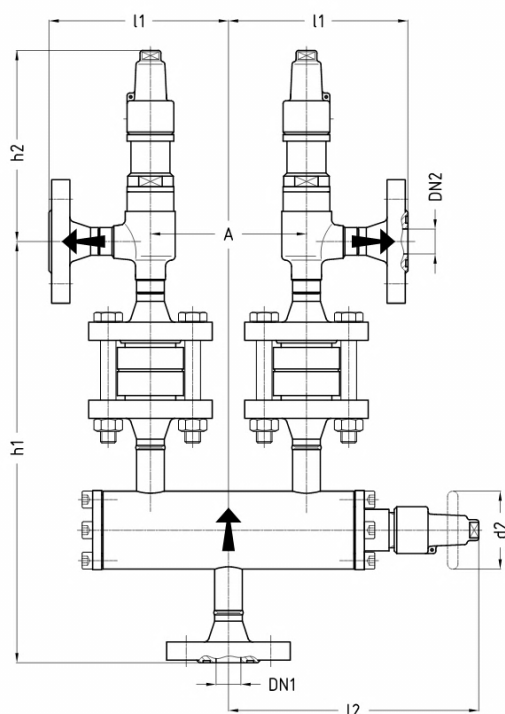

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Flanged ends acc. to:											Response pres- sure range	
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		ANSI 300 RF								h2*) for
DN1/DN2	Base	Type	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15/15	15/15		132	305	138	324	159	367	148	175	193	60	120	4-40	28-40
15/25	15/15	HB			155	340			148	175	193	60	120	4-40	28-40
20/25	15/15	HB			170	364			148	175	208	60	150	4-40	28-40
25/25	15/15	HBJ			180	343			148	175	259	120	160	4-40	28-40


Table 10: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.
Type*: HB = installation lengths according to EN-standard, DIN/EN flange facings with DIN 2512 tongue/groove as standard

13 WVR-SVUA BS FL NIRO HT

O: PTFE seat seal, **BS:** bursting discs, **FL:** flanged ends, **HT:** Temperature up to +200°C

WVR-SVU BS stainless steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

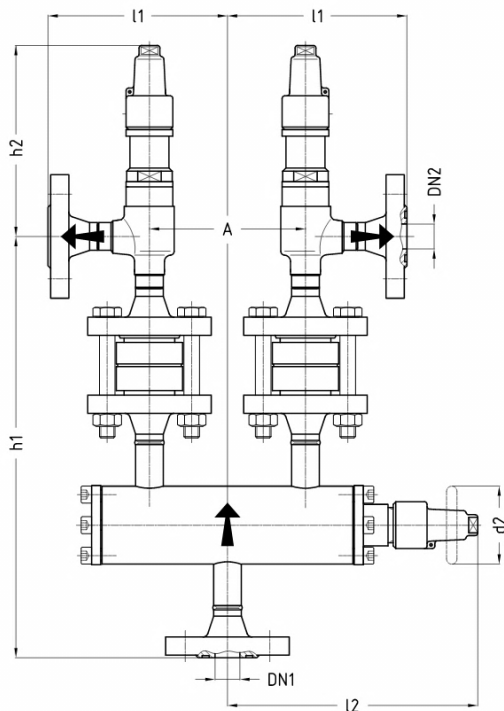

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

See Chapter 7 WVR /WVB, Chapter 8 SVA/SVU and Chapter 9 BS.

Nominal size:			Flanged ends acc. to:						Response pressure range						
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		ANSI 300 RF		h2*) for						
DN1/DN2	Base	Type	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15/15	15/15		132	305	138	324	159	367	148	175	193	60	120	4-40	28-40
15/25	15/15	HB			155	340			148	175	193	60	120	4-40	28-40
20/25	15/15	HB			170	364			148	175	208	60	150	4-40	28-40
25/25	15/15	HBJ			180	343			148	175	259	120	160	4-40	28-40


Table 11: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.
Type*: HB = installation lengths according to EN-standard, DIN/EN flange facings with DIN 2512 tongue/groove as standard

14 WVR-SVUA SE HT

O: PTFE seat seal, **SE:** Screwed ends, **HT:** Temperature up to +200°C

WVR-SVU steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

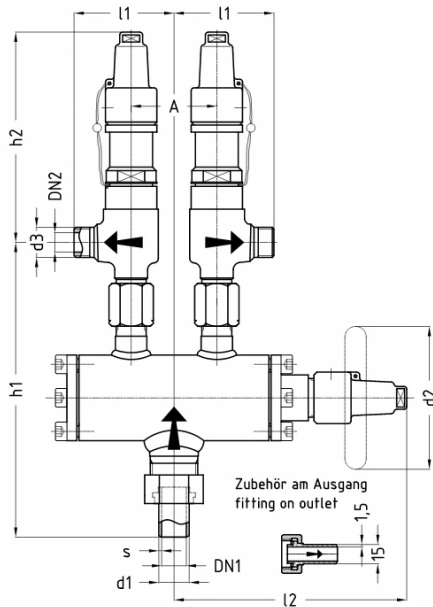

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:		Screwed ends acc. to:								Response pressure range				
DN*	Base valve	ISO Series 1	ANSI Sched40									h2*) for				
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15	15	15/15	21.3	2.0	21.3	2.8	G1/2	70	206	148	175	163	60	60	4-63	28-63


Table 12: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

15 WVR-SVUA SE NIRO HT

O: PTFE seat seal, **SE:** Screwed ends, **HT:** Temperature up to +200°C

WVR-SVU stainless steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

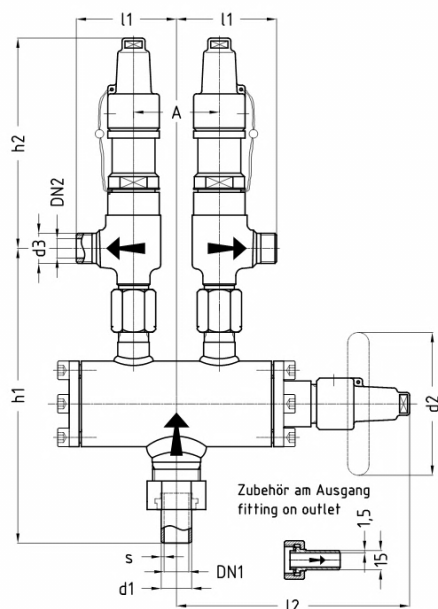

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Welding ends acc. to:				Screwed ends acc. to:									Response pressure range	
DN*		Base valve	ISO Series 1		ANSI Sched40												h2*) for
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	h2*)	l2	d2	A	bar	bar	
15	15	15/15	21.3	2.0	21.3	2.8	G1/2	70	206	148	175	163	60	60	4-63	28-63	


Table 13: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

16 WVR-SVUA BS SE HT

O: PTFE seat seal, **BS:** bursting discs, **SE:** screwed ends, **HT:** temperature up to +200°C

WVR-SVU BS steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

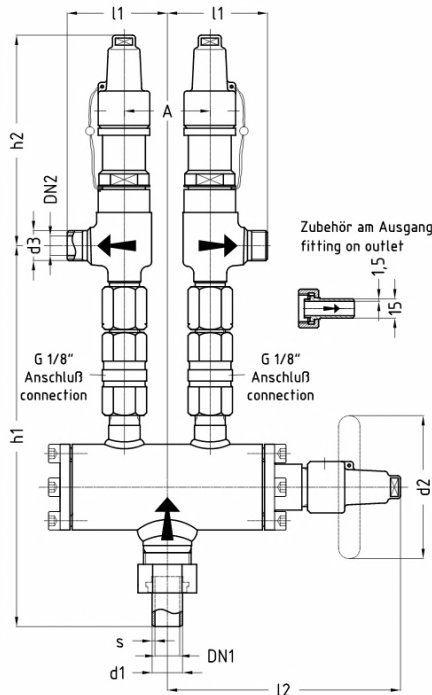

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:		Screwed ends acc. to:								Response pressure range				
DN*	Base valve	ISO Series 1		ANSI										h2*)		
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15	15	15/15	21.3	2.0	21.3	2.8	G1/2	70	268	148	175	163	60	60	4-63	28-63


Table 14: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

17 WVR-SVUA BS SE NIRO HT

O: PTFE seat seal, **BS:** bursting discs, **SE:** screwed ends, **HT:** temperature up to +200°C

WVR-SVU BS stainless steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

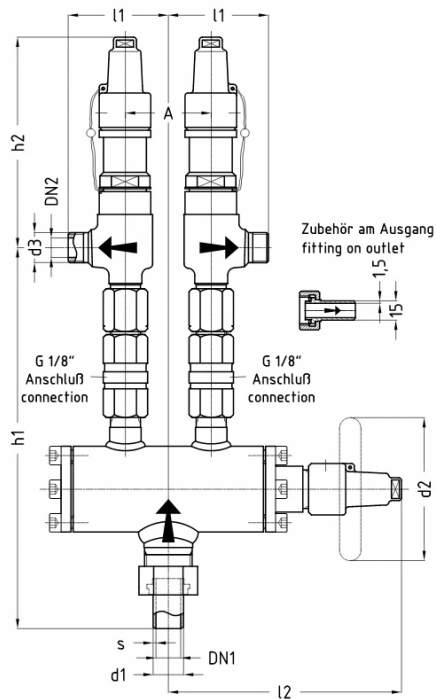

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Welding ends acc. to:		Screwed ends acc. to:							Response pressure range				
DN*		Base valve	ISO Series 1		ANSI									h2*)		
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	h2*)	l2	d2	A	bar	for
15	25	15/15	21.3	2.0	21.3	2.8	G1	70	288	148	175	163	60	60	4-63	28-63


Table 15: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

18 WVR-SVUA P FL HT

O: PTFE seat seal, **P:** high-performance, **FL:** flanged ends, **HT:** Temperature up to +200°C

WVR-SVU P steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

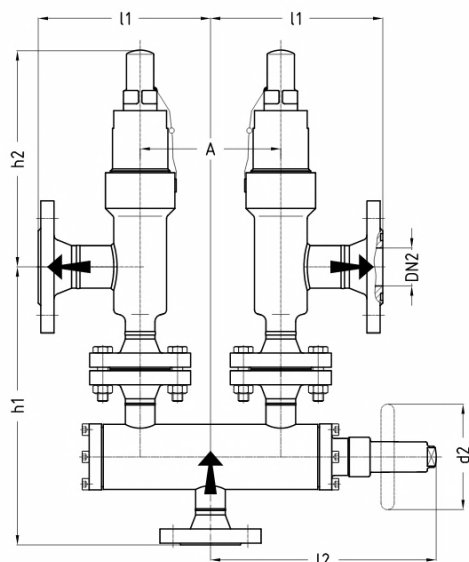

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:													Flanged ends acc. to:													Response pressure range
		Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		PN63 DIN 2636 EN1092-1		ANSI 300 RF									h2*) for							
DN1	DN2	Base	Type	l1	h1	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	A*	bar	bar							
15	25	15/25		160	281	156	300	187	321	172	330	207		193	60	120	145	5-63								
15	25	15/25	HB			155	299					207		193	60	120		5-40								
20	25	15/25	HB			170	323					207		208	60	150		5-40								
25	25	15/25	HBK			160	292					207		259	120	160		5-40								
25	25	15/25	HBJ			180	302					207		259	120	160		5-40								
20	32	20/32		185	311	183	336	206	360	198	373	238	258	208	60	150	160	5-63	40-63							
25	32	20/32	HB			180	302					238		259	120	160		5-40								
32	32	20/32	HB			195	311					238		259	120	180		5-40								
25	40	25/40		190	330	196	318	221	372	213	365	246	266	259	120	160	175	5-63	24-63							
32	40	25/40	HB			195	311					246	266	259	120	180		5-40	24-40							
40	40	25/40	HB			222	331					246	266	312	140	214		5-40	24-40							
32	50	32/50		213	344	218	338			234	384	278		259	120	180		5-40								
40	50	32/50	HB			222	331					278		312	140	214		5-40								
50	50	32/50	HB			239	355					278		319	140	228		5-40								

Nominal size:			Flanged ends acc. to:														Response pressure range	
40	65	40/65		256	333	254	352			272	403	281		312	140	214		5-40
50	65	40/65	HB			239	355					281		319	140	228		5-40
65	65	40/65	HB			283	409					281		350	140	276		5-40
50	80	50/80				388	380					402		454	140	325		5-28
65	100	65/100				478	454					595		483	140	393		5-28


Table 16: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.
 Type*: HB = installation lengths according to EN-standard, A*: for PN63 DIN-flange, DIN/EN flange facings with DIN 2512 tongue/groove as standard

19 WVR-SVUA P FL NIRO HT

O: PTFE seat seal, **P:** high-performance, **FL:** flanged ends, **HT:** Temperature up to +200°C

WVR-SVU P stainless steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

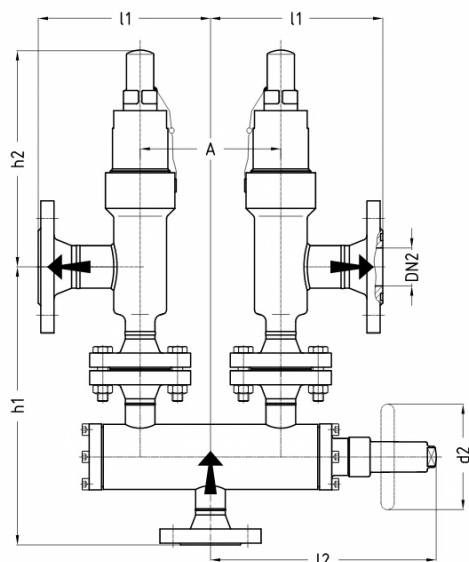

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:				Flanged ends acc. to:														Response pressure range	
	Base valve		Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		PN63 DIN 2636 EN1092-1		ANSI 300 RF								h2*) for	
DN1	DN2	Base	Type	l1	h1	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	A*	bar	bar
15	25	15/25		160	281	156	300	187	321	172	330	207		193	60	120	145	5-63	
15	25	15/25	HB			155	299					207		193	60	120		5-40	
20	25	15/25	HB			170	323					207		208	60	150		5-40	
25	25	15/25	HBK			160	292					207		259	120	160		5-40	
25	25	15/25	HBJ			180	302					207		259	120	160		5-40	
20	32	20/32		185	311	183	336	206	360	198	373	238	258	208	60	150	160	5-63	40-63
25	32	20/32	HB			180	302					238		259	120	160		5-40	
32	32	20/32	HB			195	311					238		259	120	180		5-40	
25	40	25/40		190	330	196	318	221	372	213	365	246	266	259	120	160	175	5-63	24-63
32	40	25/40	HB			195	311					246	266	259	120	180		5-40	24-40
40	40	25/40	HB			222	331					246	266	312	140	214		5-40	24-40
32	50	32/50		213	344	218	338			234	384	278		259	120	180		5-40	
40	50	32/50	HB			222	331					278		312	140	214		5-40	
50	50	32/50	HB			239	355					278		319	140	228		5-40	

Nominal size:			Flanged ends acc. to:									Response pressure range							
40	65	40/65		256	333	254	352			272	403	281		312	140	214		5-40	
50	65	40/65	HB			239	355					281		319	140	228		5-40	
65	65	40/65	HB			283	409					281		350	140	276		5-40	
50	80	50/80				388	380					402		454	140	325		5-28	
65	100	65/100				478	454					595		483	140	393		5-28	


Table 17: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, A*: for PN63 DIN-flange, DIN/EN flange facings with DIN 2512 tongue/groove as standard

20 WVR-SVUA P BS FL HT

O: PTFE seat seal, **P:** high-performance, **BS:** bursting discs, **FL:** Flanged ends, **HT:** Temperature up to +200°C
WVR-SVU P BS steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

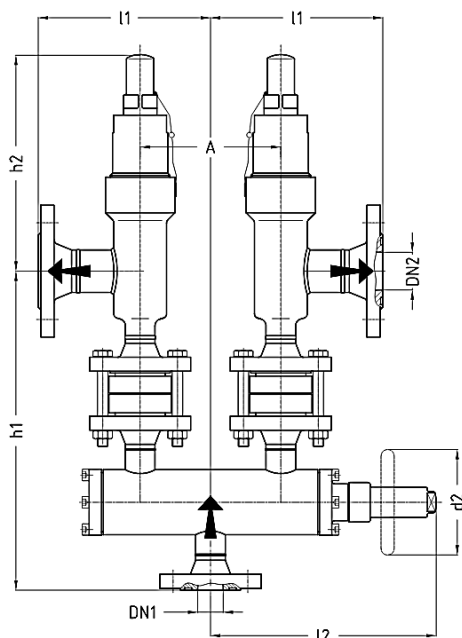

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Flanged ends acc. to:						Response pressure range						
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		ANSI 300 RF								h2*) for
DN1/DN2	Base	Type	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15/25	15/25		160	322	156	341	172	371	207		193	60	120	5-40	
15/25	15/25	HB			155	340			207		193	60	120	5-40	
20/25	15/25	HB			170	364			207		208	60	150	5-40	
25/25	15/25	HBK			160	333			207		259	120	160	5-40	
25/25	15/25	HBJ			180	343			207		259	120	160	5-40	
20/32	20/32		185	352	183	377	198	414	238		208	60	150	5-40	
25/32	20/32	HB			180	343			238		259	120	160	5-40	
32/32	20/32	HB			195	352			238		259	120	180	5-40	
25/40	25/40		190	376	196	364	213	411	246	266	259	120	160	5-40	24-40
32/40	25/40	HB			195	357			246	266	259	120	180	5-40	24-40
40/40	25/40	HB			222	377			246	266	312	140	214	5-40	24-40
32/50	32/50		213	390	218	384	234	430	278		259	120	180	5-40	
40/50	32/50	HB			222	377			278		312	140	214	5-40	
50/50	32/50	HB			239	401			278		319	140	228	5-40	
40/65	40/65		256	379	254	398	272	449	281		312	140	214	5-40	
50/65	40/65	HB			239	401			281		319	140	228	5-40	

Nominal size:			Flanged ends acc. to:										Response pressure range	
65/65	40/65	HB			283	455			281		350	140	276	5-40
50/80	50/80	HB			388	433			402		454	140	325	5-28
65/100	65/100	HB			478	511			595		483	140	393	5-28


Table 18: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, DIN/EN flange facings with DIN 2512 tongue/groove as standard

21 WVR-SVUA P BS FL NIRO HT

O: PTFE seat seal, **P:** high-performance, **BS:** bursting discs, **FL:** Flanged ends, **HT:** Temperature up to +200°C
WVR-SVU P BS stainless steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

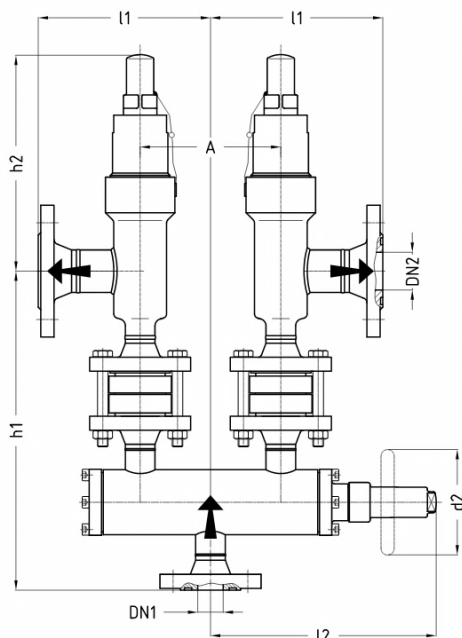

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Flanged ends acc. to:						Response pressure range						
DN*	Base valve	Type*	AWP DN10-20 PN25 DN25-80 PN40		PN25/40 DIN 2635 EN1092-1		ANSI 300 RF								h2*) for
DN1/DN2	Base	Type	l1	h1	l1	h1	l1	h1	h2	h2*)	l2	d2	A	bar	bar
15/25	15/25		160	322	156	341	172	371	207		193	60	120	5-40	
15/25	15/25	HB			155	340			207		193	60	120	5-40	
20/25	15/25	HB			170	364			207		208	60	150	5-40	
25/25	15/25	HBK			160	333			207		259	120	160	5-40	
25/25	15/25	HBJ			180	343			207		259	120	160	5-40	
20/32	20/32		185	352	183	377	198	414	238		208	60	150	5-40	
25/32	20/32	HB			180	343			238		259	120	160	5-40	
32/32	20/32	HB			195	352			238		259	120	180	5-40	
25/40	25/40		190	376	196	364	213	411	246	266	259	120	160	5-40	24-40
32/40	25/40	HB			195	357			246	266	259	120	180	5-40	24-40
40/40	25/40	HB			222	377			246	266	312	140	214	5-40	24-40
32/50	32/50		213	390	218	384	234	430	278		259	120	180	5-40	
40/50	32/50	HB			222	377			278		312	140	214	5-40	
50/50	32/50	HB			239	401			278		319	140	228	5-40	
40/65	40/65		256	379	254	398	272	449	281		312	140	214	5-40	
50/65	40/65	HB			239	401			281		319	140	228	5-40	

Nominal size:			Flanged ends acc. to:										Response pressure range	
65/65	40/65	HB			283	455			281		350	140	276	5-40
50/80	50/80	HB			388	433			402		454	140	325	5-28
65/100	65/100	HB			478	511			595		483	140	393	5-28

Table 19: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

Type*: HB = installation lengths according to EN-standard, DIN/EN flange facings with DIN 2512 tongue/groove as standard

22 WVR-SVUA P SE HT

O: PTFE seat seal, **P:** high-performance, **SE:** Screwed ends, **HT:** Temperature up to +200°C

WVR-SVU P steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

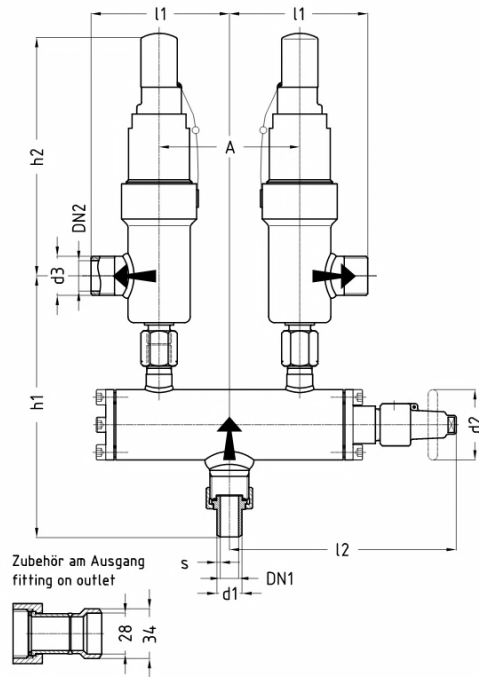

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Welding ends acc. to:				Screwed ends acc. to:							Response pressure range	
DN*		Base valve	ISO Series 1		ANSI Sched40										
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar	
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	223	207	193	60	120	5-63	


Table 20: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

23 WVR-SVUA P SE NIRO HT

O: PTFE seat seal, **P:** high-performance, **SE:** Screwed ends, **HT:** Temperature up to +200°C

WVR-SVU P stainless steel change-over safety valve combination - back-pressure independent, for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

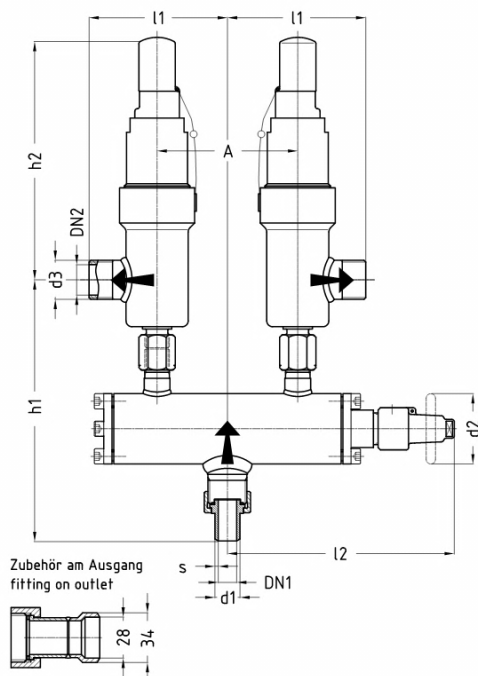

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:				Screwed ends acc. to:								Response pressure range		
DN*		Base valve	ISO Series 1		ANSI Sched40											
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar		
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	223	207	193	60	120	5-63		

Table 21: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

24 WVR-SVUA P BS SE HT

A: PTFE seat seal, **P:** high performance, **BS:** rupture discs, **SE:** screwed ends, **HT:** temperature up to +200°C

DN / INCH	PN	-50	-29	-10	+50	+150	TS [°C]
DN 50...350 2"...14"	PN25	18.7	25	25	25	21	PS [bar]

WVR-SVU P BS steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

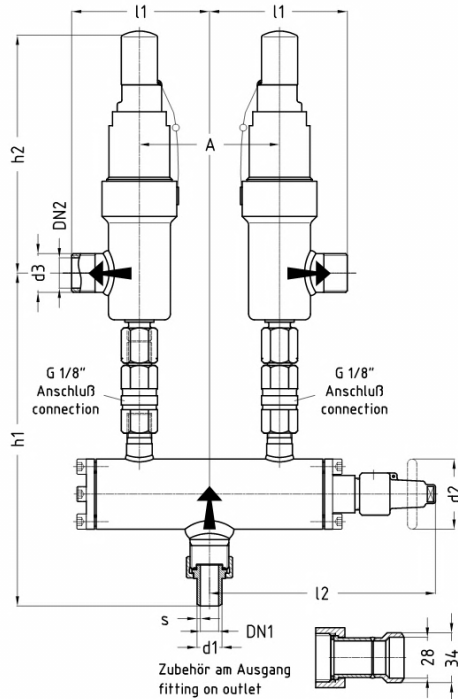

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:			Welding ends acc. to:				Screwed ends acc. to:								Response pressure range	
DN*		Base valve	ISO Series 1		ANSI Sched40											
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar		
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	285	207	193	60	120	5-63		

Table 22: Dimensions


DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

25 WVR-SVUA P BS SE NIRO HT

A: PTFE seat seal, **P:** high performance, **BS:** rupture discs, **SE:** screwed ends, **HT:** temperature up to +200°C

DN / INCH	PN	-50	-29	-10	+50	+150	TS [°C]
DN 50...350 2"...14"	PN25	18.7	25	25	25	21	PS [bar]

WVR-SVU P BS stainless steel change-over safety valve combination with bursting discs - back-pressure independent for natural gases and liquids (e.g. NH₃, CO₂) and non-corrosive media according to EN 378-1

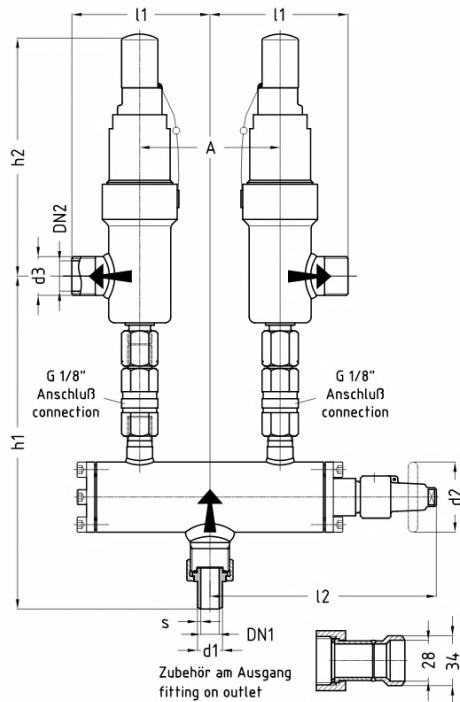

Pressure/temperature operating limits:

PS: Max. allowable operating pressure in bar

TS: Permissible operating temperature in °C corresponding to the permissible operating pressures (PS)

PN: Nominal pressure rating

Nominal size:		Welding ends acc. to:				Screwed ends acc. to:								Response pressure range		
DN*		Base valve	ISO Series 1		ANSI Sched40											
DN1	DN2	Base	d1	s	d1	s	d3	l1	h1	h2	l2	d2	A	bar		
15	25	15/25	21.3	2.0	21.3	2.8	G1	118	285	207	193	60	120	5-63		

Table 23: Dimensions

DN*: Flange connection variants consisting of base valve. Discharge capacity and component mark as base valve.

26 Legal notices

- GEA AWP valves must be handled in accordance with the GEA AWP operating regulations.
- The safety instructions mentioned in the operating regulations must be observed.
- A hazard analysis is available for GEA AWP valves.
- GEA AWP valves must only be handled by authorised persons.
- The instructions for the use of personal protective equipment (PPE) must be observed.
- GEA AWP valves must be used for their intended purpose.
- This catalogue has been carefully created and checked; however, it may still contain errors. The technical specifications given in the catalogue are not contractually guaranteed properties. Technical specifications are only binding if they have been confirmed by us in writing.
- We reserve the right to make technical changes.
- Further information on our declarations of conformity, operating regulations, calculation software and the general terms and conditions can be found on our website www.awpvalves.com under the Tools/Downloads tab.
- Our general terms and conditions apply.

GEA AWP GmbH
Armaturenstr. 2
17291 Prenzlau
Germany
phone: +49 3984 8559-0
fax: +49 3984 8559-18
e-mail: info@awpvalves.com

