


Filterelement

AWP Artikel-Nr.:

575001

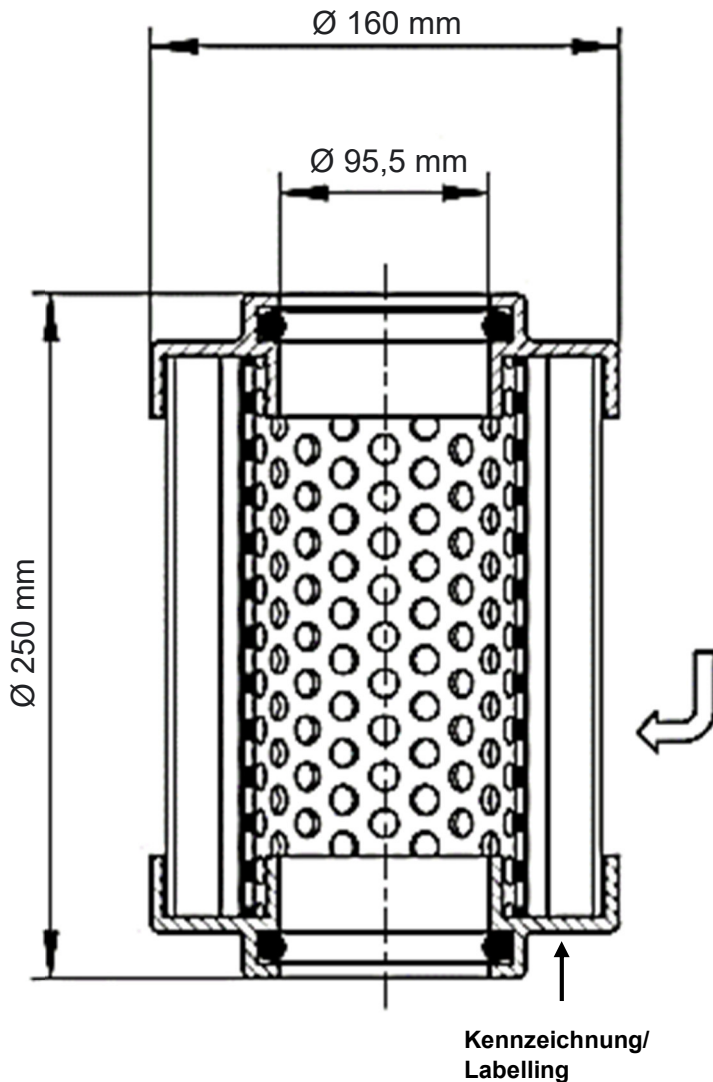

1. Technische Parameter/ Technical parameters:

Filtermaterial/ Filter media

Edelstahlgewebe/ stainless steel wire mesh

Filterfläche/ Filter area:

0,93 m²

Druckbeständigkeit/ Collapse pressure rating:

30 bar

Temperaturbeständigkeit/ Temperature rating:

-40 °C bis/ to +100 °C

Filterfeinheit/ Filtration grade:

25 µm

Filtrationsquotient/ filtration ratio:

-

Dichtungswerkstoff/ Sealing material:

Neopren ISO3601-1-XXXX-94X5-N-CR90

Max. NH₃ Gehalt/ max. ammonia concentration:

10% NH₃ und/ and 90% Reflo 68A @80°C; -40°C


Max. Wassergehalt/ max. water concentration:

1000 ppm H₂O in Mineralöl/ mineral oil

2. Kennzeichnung/ Labelling:

Art.-Nr. / Item No: 575001EPE

Los-Nr. / Lot-Nr.: z.B. Juni / June 2020 → "0620"

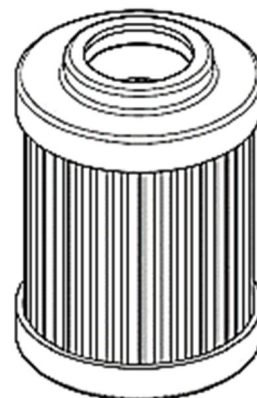

010621

Maß- bzw. Konstruktionsänderungen vorbehalten!

We reserve the right to make changes to dimensions or construction!



Armaturenstr. 2, 17291 Prenzlau, Germany

phone +49 (0)3984 8559-0

e-mail sales@awpvalves.com


fax +49 (0)3984 8559-31

url awpvalves.com

Filterelement

AWP Artikel-Nr.:

575008

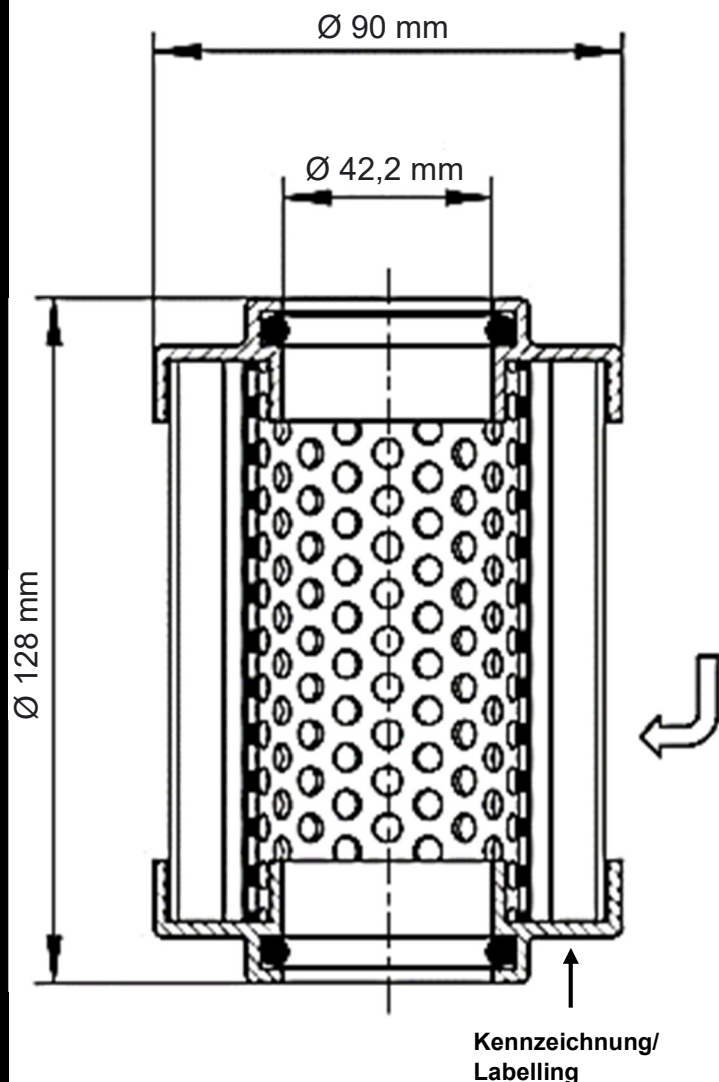

Kennzeichnung/
Labelling

1. Technische Parameter/ Technical parameters:

Filtermaterial/ Filter media

Edelstahlgewebe/ stainless steel wire mesh

Filterfläche/ Filter area:

0,22 m²

Druckbeständigkeit/ Collapse pressure rating:

10 bar

Temperaturbeständigkeit/ Temperature rating:

-40 °C bis/ to +100 °C

Filterfeinheit/ Filtration grade:

25 µm

Filtrationsquotient/ filtration ratio:

β_{10(c)} ≥ 200 (ISO 16889)

Dichtungswerkstoff/ Sealing material:

Neopren ISO3601-1-223A-40,87X3,53-N-CR70

Max. NH₃ Gehalt/ max. ammonia concentration:

10% NH₃ und/ and 90% Reflo 68A @80°C; -40°C


Max. Wassergehalt/ max. water concentration:

1000 ppm H₂O in Mineralöl/ mineral oil

2. Kennzeichnung/ Labelling:

Art.-Nr. / Item No: 575008EPE

Los-Nr. / Lot-Nr.: z.B. Juni / June 2020 → "0620"

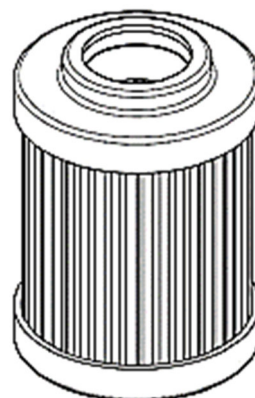

010621

Maß- bzw. Konstruktionsänderungen vorbehalten!
We reserve the right to make changes to dimensions or construction!



Armaturenstr. 2, 17291 Prenzlau, Germany

phone +49 (0)3984 8559-0

e-mail sales@awpvalves.com


fax +49 (0)3984 8559-31

url awpvalves.com

Filterelement

AWP Artikel-Nr.:

575044

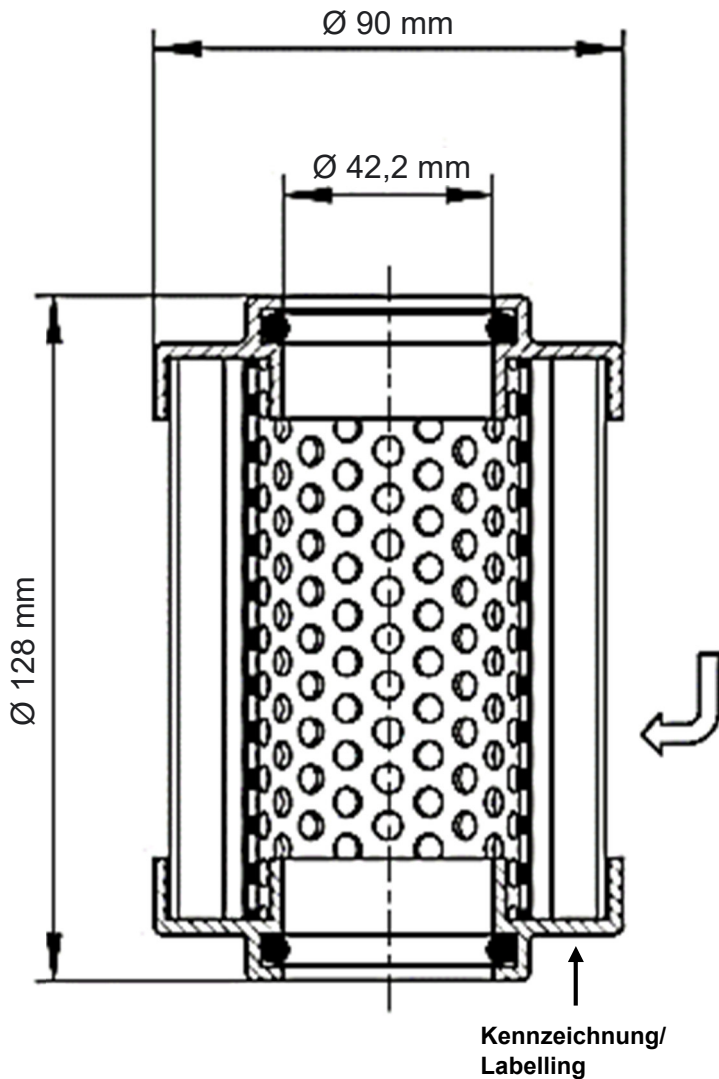

1. Technische Parameter/ Technical parameters:

Filtermaterial/ Filter media

mehrlagiges Glasfasermaterial/ multi-layer glass fiber material

Filterfläche/ Filter area:

0,22 m²

Druckbeständigkeit/ Collapse pressure rating:

10 bar

Temperaturbeständigkeit/ Temperature rating:

-40 °C bis/ to +100 °C

Filterfeinheit/ Filtration grade:

10 µm

Filtrationsquotient/ filtration ratio:

$\beta_{10(c)} \geq 200$ (ISO 16889)

Dichtungswerkstoff/ Sealing material:

Neopren ISO3601-1-223A-40,87X3,53-N-CR70

Max. NH₃ Gehalt/ max. ammonia concentration:

10% NH₃ und/ and 90% Reflo 68A @80°C; -40°C


Max. Wassergehalt/ max. water concentration:

1000 ppm H₂O in Mineralöl/ mineral oil

2. Kennzeichnung/ Labelling:

Art.-Nr. / Item No: 575044EPE

Los-Nr. / Lot-Nr.: z.B. Juni / June 2020 → "0620"

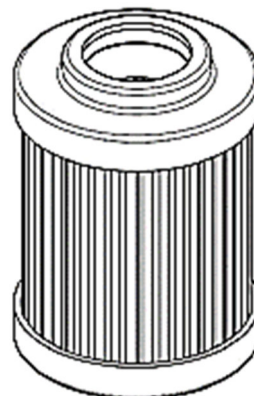

010621

Maß- bzw. Konstruktionsänderungen vorbehalten!

We reserve the right to make changes to dimensions or construction!



Armaturenstr. 2, 17291 Prenzlau, Germany

phone +49 (0)3984 8559-0

e-mail sales@awpvalves.com


fax +49 (0)3984 8559-31

url awpvalves.com

Filterelement

AWP Artikel-Nr.:

575045

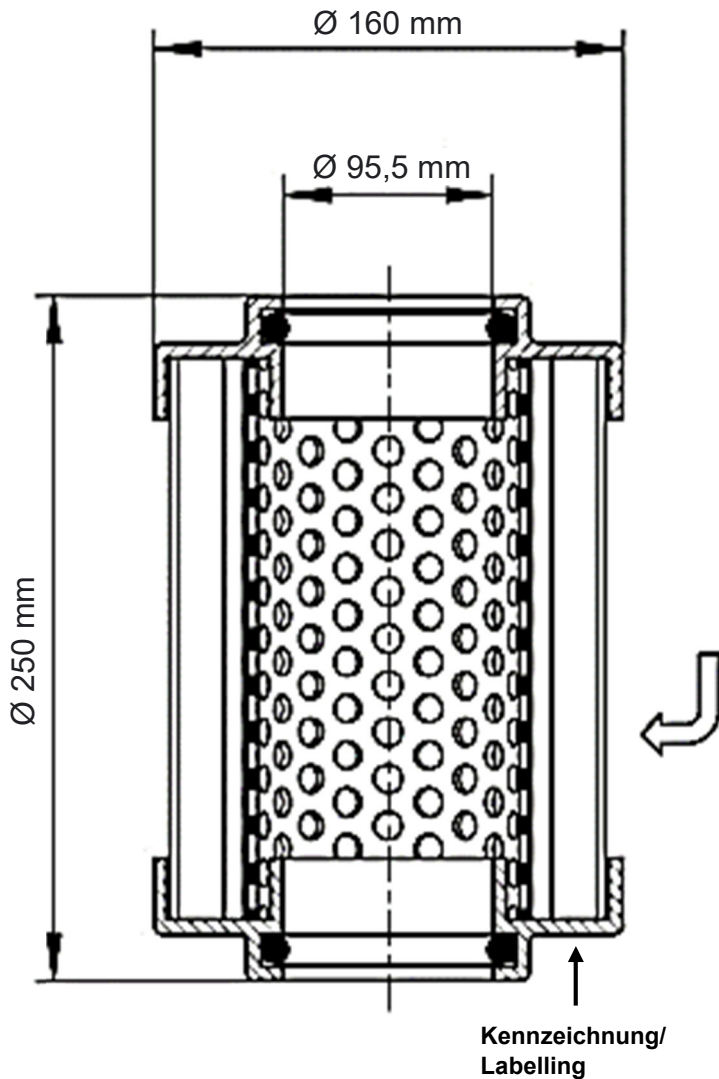

1. Technische Parameter/ Technical parameters:

Filtermaterial/ Filter media

mehrlagiges Glasfasermaterial/ multi-layer glass fiber material

Filterfläche/ Filter area:

0,93 m²

Druckbeständigkeit/ Collapse pressure rating:

30 bar

Temperaturbeständigkeit/ Temperature rating:

-40 °C bis/ to +100 °C

Filterfeinheit/ Filtration grade:

10 µm

Filtrationsquotient/ filtration ratio:

$\beta_{10(c)} \geq 200$ (ISO 16889)

Dichtungswerkstoff/ Sealing material:

Neopren ISO3601-1-XXXX-94X5-N-CR90

Max. NH₃ Gehalt/ max. ammonia concentration:

10% NH₃ und/ and 90% Reflo 68A @80°C; -40°C


Max. Wassergehalt/ max. water concentration:

1000 ppm H₂O in Mineralöl/ mineral oil

2. Kennzeichnung/ Labelling:

Art.-Nr. / Item No: 575045EPE

Los-Nr. / Lot-Nr.: z.B. Juni / June 2020 → "0620"

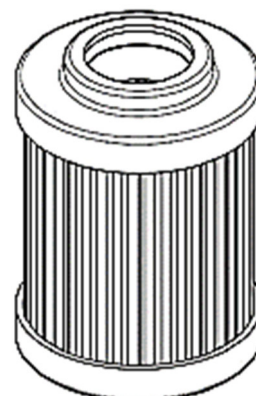

010621

Maß- bzw. Konstruktionsänderungen vorbehalten!

We reserve the right to make changes to dimensions or construction!



Armaturenstr. 2, 17291 Prenzlau, Germany

phone +49 (0)3984 8559-0

e-mail sales@awpvalves.com

fax +49 (0)3984 8559-31

url awpvalves.com